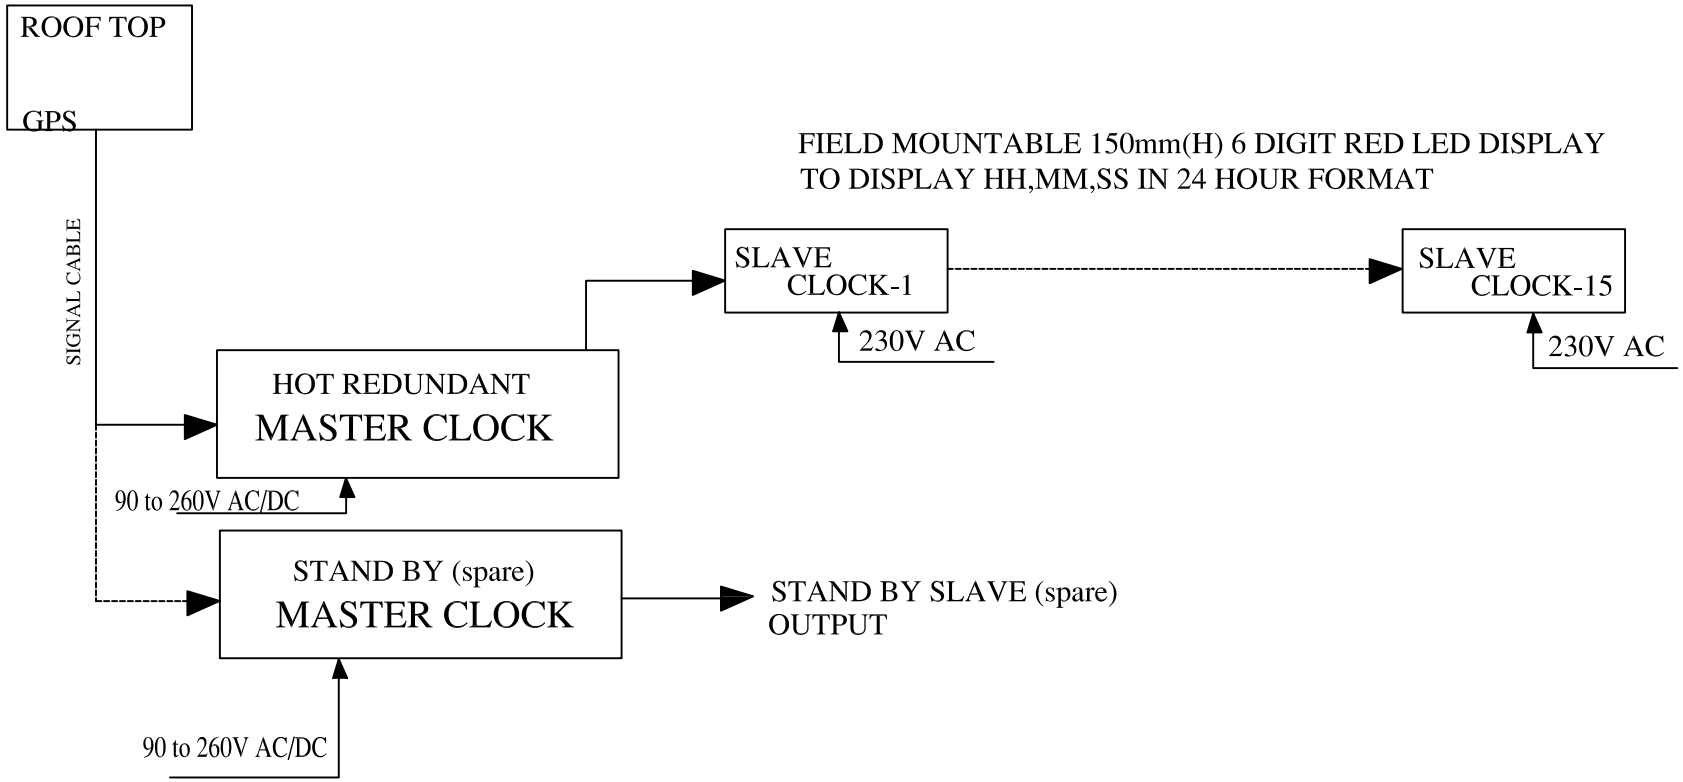

NOTE :-* SLAVE CLOCKS ARE CONNECTED WITH MASTER CLOCK BY PARALLEL CONNECTION.

* SLAVE CLOCK BOOSTER IS PROVIDED IF MORE THEN 10 SLAVE CLOCK CONNECTED IN A LOOP (or) IF CABLE RUN DISTANCE EXCEED 600 Mtrs.

* MASTER CLOCK SUPPLY VOLTAGE 90 to 260V AC/DC

* ALL SLAVE CLOCK SUPPLY VOLTAGE 230V AC

REV	REVISION DETAILS	DRN	CHKD	APPD	DATE
					DRN. BY: GS
					CHKD. BY: GS
					APPD. BY: RGN
					DATE: 18-12-06

SERTEL ELECTRONICS PVT. LIMITED., CHENNAI -96

SCHEME DIAGRAM: ROOF TOP GPS & REDUNDANT MASTER, SLAVE CLOCK SYSTEM.

CUSTOMER : TYPICAL DRAWING

DRAWING NO. : RGN/2006/11/101

00

SHEET 01 OF 02

REV